

# INSULATED PANELS

SEE THE DIFFERENCE IN APPEARANCE,  
VALUE, PERFORMANCE AND INSTALLATION



**ARCHITECTURAL METAL SYSTEMS (AMS)** manufactures metal standing seam roof systems for new and retrofit construction markets throughout North America and traditional metal roof panel and wall panel systems for remodeling applications. In addition to offering a full line of wall and roof panels, our insulated panels rank as one of the most energy-efficient, well-made, cost-effective building solutions on the market.



### THE ULTIMATE COMBINATION OF BRAINS & BEAUTY

Our insulated panels embody attractive styling and cutting-edge energy efficiency. Designed with some of the latest in scientific breakthroughs, our panels are lightweight, durable and still maintain their ease of installation and visual appeal. Now is the best time to build with AMS insulated panels because the benefits have never been greater.

### ATTRACTIVE & LIGHTWEIGHT

One of the most sophisticated building products on the market today, insulated panels offer a clean, consistent and high-quality appearance that immediately adds perceived value to any building. Insulated panels enhance the visual appearance of your buildings, and their remarkable light weight reduces structural requirements and installation costs.

### STURDY & DURABLE


The panels incorporate a finished interior liner, factory-applied air and vapor shield, and insulated foam core finished exterior weathering surface into a single building unit. The composite action resulting from a chemical bond between the poured-in-place foam core and steel skins creates a lightweight, rigid unit with exceptional spanning capacity.

### EASY TO INSTALL & AFFORDABLE

Lightweight and simplified fastening systems deliver quick installation and reduce labor costs. The panels themselves are very affordable, in part because of their lowered shipping costs attributed to their light weight. Panels can even be installed in adverse weather conditions.

### THE ULTIMATE IN ENERGY EFFICIENCY

You get 100% reliable thermal performance and insulation continuity – no cavities, no gaps, no crushed insulation and no cold bridges. No change of R-value occurs when purlin and girt center dimensions are varied. The insulated core is one of the most thermally effective insulants commonly available today. Insulation values can be easily increased by simply increasing the thickness of the panels.



**PLANK PROFILE**  
Insulated Wall Panel



**STRIATED PROFILE**  
Insulated Wall Panel



**HEAVY EMBOSSED FLAT PROFILE**  
Insulated Wall Panel



**STANDING SEAM**  
Insulated Roof Panel


## INSULATED WALL PANELS

Each project follows a different set of parameters and, as such, may require a different set of wall panels. We offer a selection of panels to accommodate the needs of any project. Each of our three wall panel profiles detailed below is ideally suited for commercial and industrial applications. The wide panels install quickly and easily. Fasteners are concealed within the panel side joint, and the attractive profiles break up the flat expanse of metal on large projects such as manufacturing plants or warehouses.




### STRIATED PROFILE

Exterior Finish: Smooth - No Emboss



### PLANK PROFILE

Exterior Finish: Smooth - No Emboss



### HEAVY EMBOSSED FLAT PROFILE

Exterior Finish: Heavy Embossed Flat



## INSULATED WALL PANEL FEATURES & BENEFITS

- The double tongue and groove is self-aligning and weather-tight, and it allows for sealant application at either the interior or exterior side of the panel joinery depending on the direction of the vapor drive.
- Hidden/concealed fasteners give the panel a clean, aesthetically appealing appearance.
- Removable film prevents damage to the exterior of the panel during shipping and installation.
- Panels arrive on-site in one piece and require one simple-step installation, reducing construction time and costs.
- Standard exterior and interior steel surface is 26-gauge.

### Wall Systems Specifications Striated, Plank & Heavy Embossed Flat Profiles

| Panel Thickness   | 2"                           | 2.5"   | 3"     | 4"     |
|---|------------------------------|--------|--------|--------|
| Insulating "R" Values*  | R16                          | R20    | R24    | R32    |
| *R Values are derived from thermal testing per ASTM C518 @ 40°F mean and ASTM C1363 @ 35°F mean. For project specific values, please contact your sales representative. |                              |        |        |        |
| Insulating "U" Factors  | U0.061                       | U0.049 | U0.041 | U0.031 |
| Panel Width   | 40"                          |        |        |        |
| Minimum Length  | 8'0"                         |        |        |        |
| Maximum Length  | 56'0"                        |        |        |        |
| Application   | Vertical                     |        |        |        |
| Exterior Gauge (Standard)   | 26 ga.                       |        |        |        |
| Interior Gauge  | 26 ga.                       |        |        |        |
| Exterior Paint Coating  | cool-scape™ (PVDF)**         |        |        |        |
| **When using field-applied coatings, always order Polyester.  |                              |        |        |        |
| Interior Paint Coating  | Polyester**                  |        |        |        |
| Interior Finish   | Light Emboss - Plank Profile |        |        |        |

| INSULATED WALL PANELS                                  |           |            |    |    |    |    |    |    |    |    |    |    |
|--|-----------|------------|----|----|----|----|----|----|----|----|----|----|
| MAXIMUM SPECIFIED UNIFORMLY DISTRIBUTED PRESSURE (psf) |           |            |    |    |    |    |    |    |    |    |    |    |
|  | THICKNESS | Span (ft.) |    |    |    |    |    |    |    |    |    |    |
|  |           | 5          | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 |
| Gauge<br>26/26   | 2"        | 56         | 50 | 42 | 35 | 30 | 25 | 22 | 19 | 17 | 14 | 12 |
|  | 2 1/2"    | 70         | 57 | 48 | 41 | 35 | 31 | 28 | 24 | 21 | 18 | 16 |
|  | 3"        | 75         | 62 | 54 | 46 | 40 | 35 | 33 | 31 | 28 | 25 | 22 |
|  | 4"        | 89         | 73 | 62 | 53 | 47 | 41 | 39 | 37 | 33 | 30 | 28 |




## INSULATED ROOF PANELS

These mechanically seamed roof panels are an ideal solution where energy-efficient standing seam roof panels are required. The unique design of this panel allows for 26-gauge exterior and interior skins, saving money and weight on a building.



### STANDING SEAM

Exterior Finish: Smooth - No Emboss

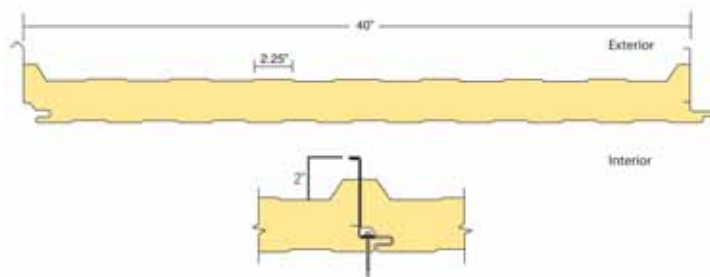

### INSULATED ROOF PANEL FEATURES & BENEFITS

- The panel's standing seam joint is self-aligning and allows for easy sealant application at the panel joinery.
- Panels arrive on-site in one piece and require one simple-step installation, reducing construction time and costs.
- Standard exterior and interior steel surface is 26-gauge.
- The standing seam joint is 180-degree field seamed.

### Roof Systems Specifications Standing Seam

| Thickness  | 3.5"                         | 4"     | 5"     | 6"     |
|--|------------------------------|--------|--------|--------|
| Insulating "R" Values*   | R26                          | R32    | R42    | R50    |
| <small>*R Values are derived from thermal testing per ASTM C518 @ 40°F mean and ASTM C1363 @ 35°F mean. For project specific values, please contact your sales representative.</small> |                              |        |        |        |
| Insulating "U" Factors   | U0.038                       | U0.031 | U0.024 | U0.020 |
| Panel Width  | 40"                          |        |        |        |
| Minimum Length   | 8'0"                         |        |        |        |
| Maximum Length   | 56'0"                        |        |        |        |
| Exterior Gauge (Standard)  | 26 ga.                       |        |        |        |
| Interior Gauge (Standard)  | 26 ga.                       |        |        |        |
| Exterior Paint Coating   | cool-scape™ (PVDF)           |        |        |        |
| Interior Paint Coating   | Polyester                    |        |        |        |
| Interior Finish  | Light Emboss - Plank Profile |        |        |        |
| Minimum Roof Pitch   | 1/2:12                       |        |        |        |

| INSULATED STANDING SEAM ROOF PANEL                      |                 |                    |        |        |       |      |      |      |      |
|---|-----------------|--------------------|--------|--------|-------|------|------|------|------|
| ALLOWABLE LOAD FOR STANDING SEAM 26/26 ROOF PANEL (psf) |                 |                    |        |        |       |      |      |      |      |
| SPAN (ft.)  |                 |                    |        |        |       |      |      |      |      |
| THICKNESS   | NUMBER OF SPANS | PANEL WEIGHT (psf) | 5      | 6      | 7     | 8    | 9    | 10   | 11   |
| 2.5"  | Simple Multiple | 2.33               | 4856   | 4147   | 3238  | 2229 | 1924 | 1317 | 1014 |
| 3.25"   | Simple Multiple | 2.48               | 6384   | 4961   | 4347  | 3540 | 2531 | 2126 | 1621 |
| 4"  | Simple Multiple | 2.65               | 88102  | 7283   | 6169  | 5157 | 3945 | 3038 | 2433 |
| 5"  | Simple Multiple | 2.86               | 113120 | 95105  | 7791  | 6874 | 5460 | 4052 | 3245 |
| 6"  | Simple Multiple | 3.12               | 137143 | 115126 | 95114 | 8594 | 6874 | 4868 | 4258 |

## ADOBETEXTURE™

AdobeTexture™ factory finish coated wall panels offer a low gloss, multi-textured profile and finish system that simulates a troweled stucco appearance.

The panel's exterior stucco-like surface is a hard aggregated fiber-reinforced polymer finish. This factory-applied finish combines an attractive appearance with durability, resisting the effects of impact, abrasion and weather.


The interior panel face is finished in an attractive fine line configuration that can act as a finished interior wall.

The AdobeTexture insulated wall panels deliver excellent energy efficiency. The factory-applied joint sealant provides a complete wall-system weather barrier.

Panels are offered in 2- to 4-inch thicknesses. Panel width is 40" and panels are available in lengths from 8' to 56'. Installation of panels is simple and secure, requiring only a simple clip.



### ADOBETEXTURE™ WALL PANELS Exterior Finish: Multi-textured Profile

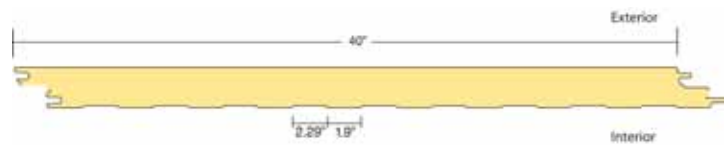

#### ADOBETEXTURE™ PANEL FEATURES & BENEFITS

- Eliminates need for elastomerics
- Breakthrough technology bringing stucco look and texture to insulated wall panels
- Same easy installation as standard wall paneling
- Eliminates multi-step field assembly currently needed for stud and stucco systems
- Self-alignment double tongue and groove with concealed fastener joints
- Matching AdobeTexture trim for a clean, continuous look and feel
- 25-year factory warranty on finish system including adhesion, chalking and fading



## COLOR SELECTION


Our insulated wall panels benefit from our many years of experience in the metal products industry and the use of our cool coating technology.

To be considered cool, products must have a solar reflectance of at least 25%. Solar reflectance is the measure of a panel's ability to not absorb certain wavelengths of the sun. Another important factor is thermal emittance, the measure of a panel's ability to release heat that it has absorbed. Put these two factors together and you get the solar reflectance index, the measure of a panel's ability to reflect solar heat. Using insulated wall and roof panels as part of your whole cool-coated metal system can reduce energy consumption by more than 40% (as reported by the Oak Ridge National Laboratory).

### EXTERIOR COLORS - cool-scape™ PVDF

#### These colors utilize cool coating technology

These "cool" exterior coatings feature vivid, fade-resistant color, incredible durability and environmentally friendly cool technology originally developed for stealth aircraft in the U.S. military. This is by far the best paint system available on the market for commercial buildings.



**Regal White**  
IR .72 SRI 87



**Warm White**  
IR .59 SRI 70



**Surrey Beige**  
IR .51 SRI 58



**Pearl Gray**  
IR .50 SRI 57



**Royal Blue**  
IR .29 SRI 29



**Evergreen**  
IR .30 SRI 31

IR = Initial Reflectance • SRI = Solar Reflectance Index

### ADOBETEXTURE™ WALL PANELS



**Regal White Adobe**



**Sandstone Adobe**



**Surrey Beige Adobe**



**Pearl Gray Adobe**

### INTERIOR COLOR - POLYESTER



**Imperial White**

NOTE: When using field-applied coatings, always order Imperial White Polyester for the exterior coating.



## ABOUT ARCHITECTURAL METAL SYSTEMS

Headquartered in Eufaula, AL, Architectural Metal Systems has a heritage of more than 25 years of design, technical, quality leadership and innovation in the metal roofing industry. AMS supports its customers with superior service through regional manufacturing facilities and a network of technical customer service centers.

AMS manufactures and supplies quality metal standing seam roof systems, including rigid board insulation, for new construction markets throughout North America. AMS also provides traditional metal roof panel and wall panel systems for new and retrofit applications.

## CAPABILITIES

AMS has become the pre-eminent roofing expert and innovator. Architectural Metal Systems is a division of American Buildings Company and a NUCOR Company.

### AMS Metal Roof Systems - The Innovative Choice

- Long roof life
- Great durability
- Proven weather tight system
- Can meet high wind uplift ratings
- Industry's best warranty program
- Minimal to zero maintenance
- Low cost of ownership
- Unmatched certification program
- 100% recyclable
- Reduces energy costs up to 30%
- Wide variety of panel styles
- Great choice of colors
- Engineered for any challenge
- Innovative design software



**1150 State Docks Road**  
**Eufaula, AL 36027**  
**Phone - 888-621-5020**  
**Fax - 334-687-0298**