

FLAT SL PANEL

TECHNICAL DATA SHEET

Designed for soffit applications, the Flat SL Panel offers flat, 12" panel coverage. It features a lock joint design that permits the placement of concealed fasteners and minimizes moisture intrusion.

Panel Length
Standard: 1' - 25'


Surface Finish
Standard: Smooth

Panel Width
12"

Substrates
Standard: 24 gauge
G-90 Galvanized Steel


Panel Depth
1 1/2"

PANEL OPTIONS

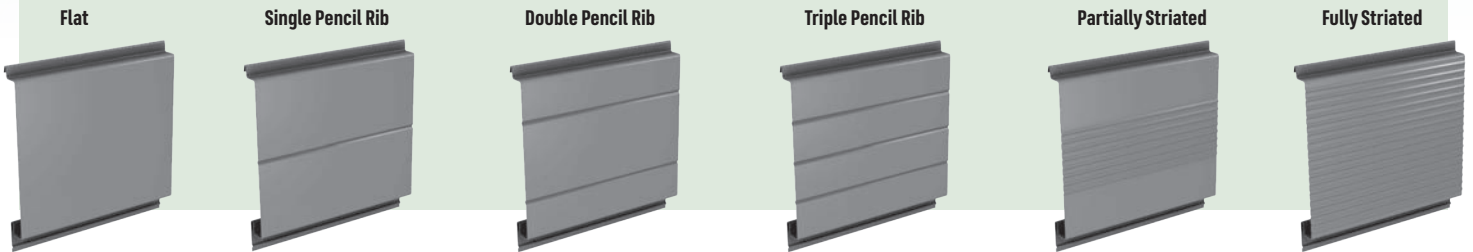


DESIGN FEATURES & BENEFITS


- Excellent for new construction and retrofit projects.
- Concealed fasteners create a crisp, clean aesthetic.

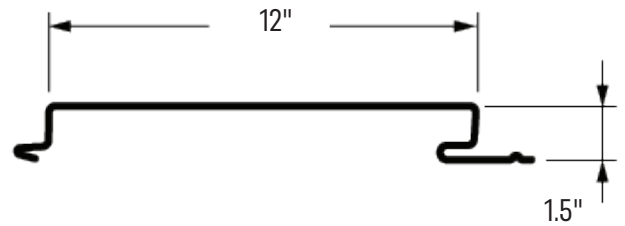

TESTING

TEST	CHARACTERISTIC	TEST METHOD	TEST TITLE	RESULTS
 Structural	Wind Loads	ASTM E72	Determines structural performance under uniform static air pressure difference	See load-span tables for allowable spans/loads under positive or negative loading.

STANDARD COLORS

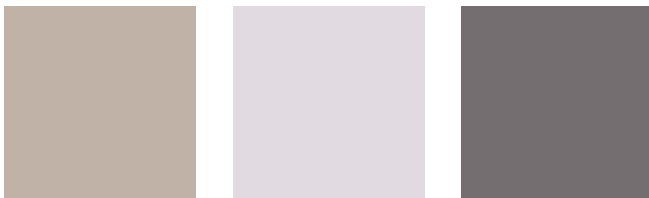

Desert Sand (DS)

Regal White (RW)

Slate Gray (SG)



Recommended orientation as shown above for Flat SL Panel soffit applications.